

700 Series

Perforated Metal Ceilings





STANDARD DESIGNS

Perforations Finishes P1 700 701 P8 14% open ■ .7-.75 NRC Brushed Matte **Brushed Gloss** 8% open • .5-.6 NRC P9 702 710 P12 Metallic Silver Distressed 8% open • .5-.6 NRC 1% open • minimal NRC P15 P16 711 712 8.36% open • .5-.65 NRC 10.6% open • .65-.7 NRC White Woodgrain #1 713 714 P18 Woodgrain #2 Metallic White 13% open ■ .7-.75 NRC 6.67% open • .5-.65 NRC

Cover photos:




Finishes 700-702 and 711 are available in the color of your choice for an additional charge. Specifier will need to provide a color chip or Pantone number for preproduction matching by Gage.

Due to the metallic nature of these finishes, the photography may not accurately portray the actual finish. Please contact the Gage Factory for finish samples.

P15-712

NEW PERFORATION PATTERNS

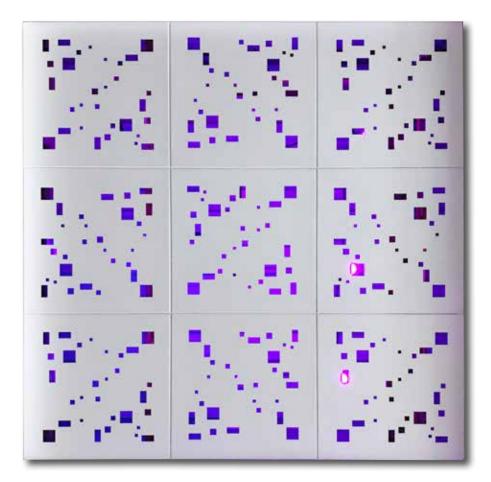




P19

Random sizes of squares and rectangles are shown here on a 711 white tile (with purple LED lighting). P19-711



P20


Random sizes of circles are shown here on a 158 bronze pattern tile (with blue LED lighting). P20-158

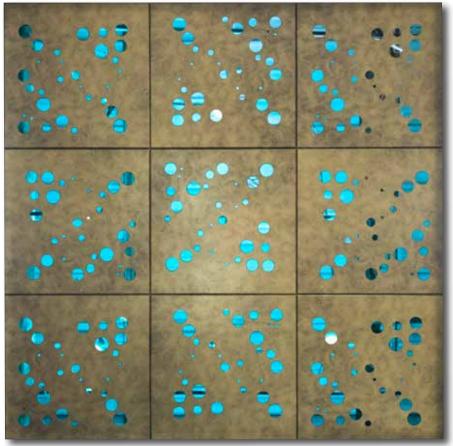


SELECTIVE DESIGNS

Selective designs combine proprietary Gage machining processes to create patterns that register with the perforation. The effect is unique, high tech and definitely Gage.



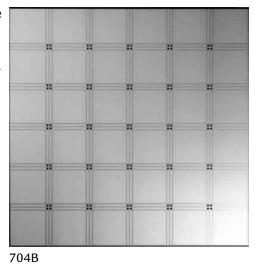

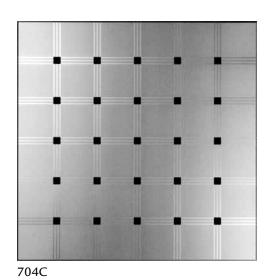





















P8-250








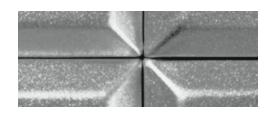


PRODUCT INSTALLATIONS

Design P15-712 Woodgrain, System D1.1

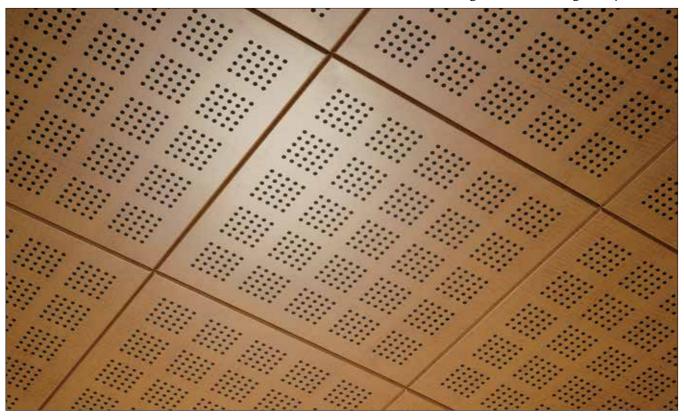

Design P18-711 White, System D1.1

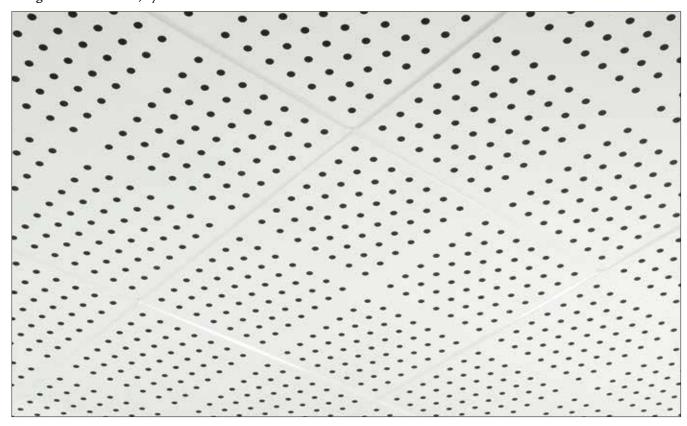

PRODUCT INSTALLATIONS

Elevator Lobby Sydney, Australia Peddle, Thorp and Walker Architects

> Design P12-701 System M1.1





Corporate Lobby Sydney, Australia Valge Architects

Design P8-700 System M1.1

DESIGN OPTIONS



Design P8-250, System D3.3


age 700 Series perforated metal ceilings come standard with an open perforation that can be used for a number of purposes.

For acoustical perforation the 700 Series tiles are laminated at the factory with a Soundtex® acoustical membrane.

The noise reduction coefficient will be relative to the hole pattern and open area.

Open perforations are typically used with a blacked out plenum for added visual depth and aesthetics.

Design 704B, System D1.1

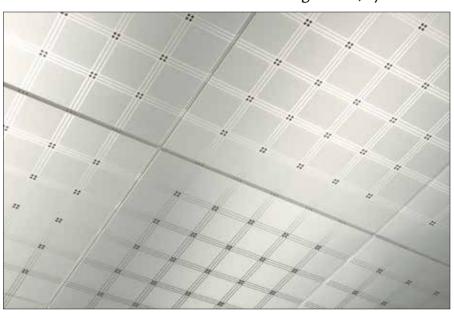

DESIGN SPECIFICATIONS

Profile System D1 & M1

GAGE concealed snap-in ceiling Item:

Profiles: D1.1 or M1.1 (flat)

As specified Design:

Perforations: Per specified design Finish: Per specified design Sizes: (D1) 24 in. x 24 in


(M1) 600 mm x 600 mm

(D1) .030 in. aluminum Metal: (M1) .762 mm aluminum

(50% recycled)

Concealed snap-in grid by GAGE Carrier:

or equal

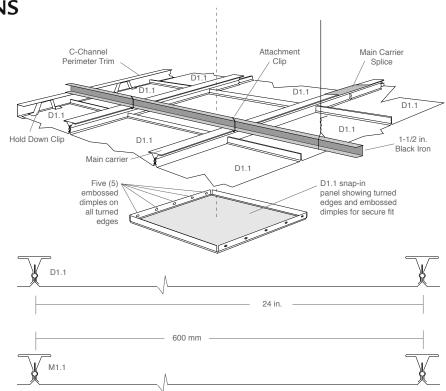

Profile System D3

GAGE lay-in ceiling panel Item:

Profiles (standard):

D3.1 (flush) 1,2

Profiles (5/8 in. tegular):

D3.3 (flat) 2

Profiles (1/4 in. tegular):

D3.5 (flat) 1

Design: As specified

Perforations: Per specified design Finish: Per specified design

Size: 24 in. x 24 in. (nominal)

.030 in. aluminum Metal:


(50% recycled)

Carrier: By others-

> If requested, GAGE will provide a custom painted, clear-coated, grid that will complement ceiling panels. To secure this option, please specify "...Custom colored grid by GAGE."

¹ 9/16 inch T-Bar

² 15/16 inch T-Bar

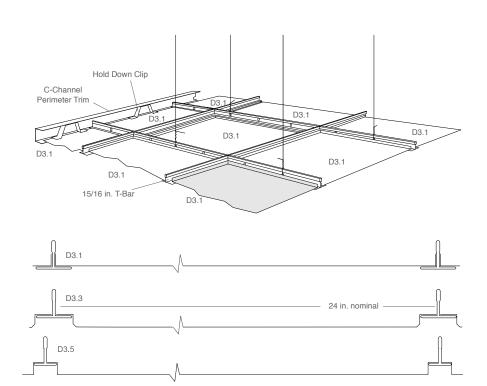



777 S. Black River St., Suite 2 Sparta, WI 54656 TF: 800-786-4243 PH: 608-269-7447

FX: 608-269-7622

info@gagecorp.net • www.gagecorp.net

