


GAGEMETAL[®]

Fingerprint Resistant Coating (FRC) on Stainless Steel

Our FRC aids in ease of removal of fingerprints and other unwanted adornments by diminishing the ability of marks to adhere to the surface. Liquids can be removed with less effort due to the hydrophobic quality of the FRC.



GM403 Non-Directional

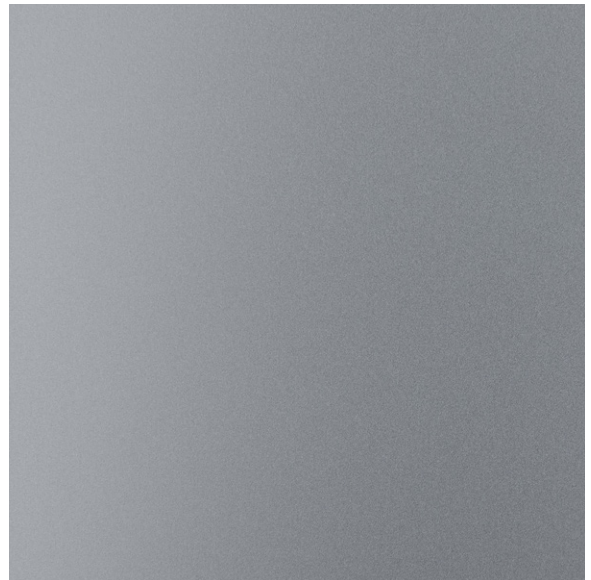

GM423 Pallinato




GM437 #4 Brushed




GM438 Long Grain Satin

*Digital print processes cannot exactly replicate the color and finish nuances of our metal products.
Please request a physical sample for an accurate color match.*

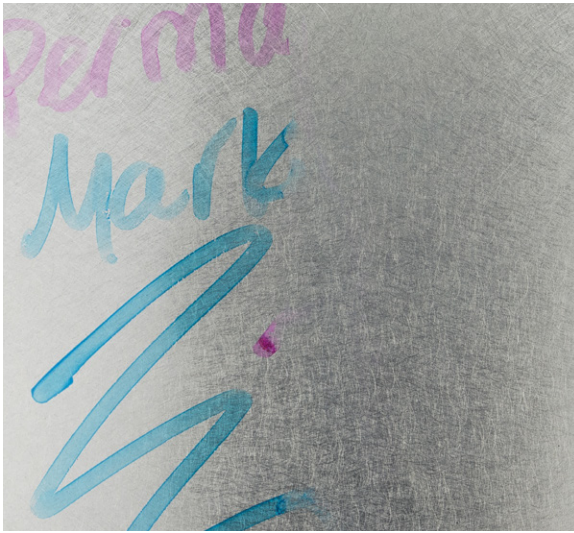

- Magenta and cyan permanent marker.
- Dried for 24 hours before removing with rubbing alcohol and microfiber cloth.

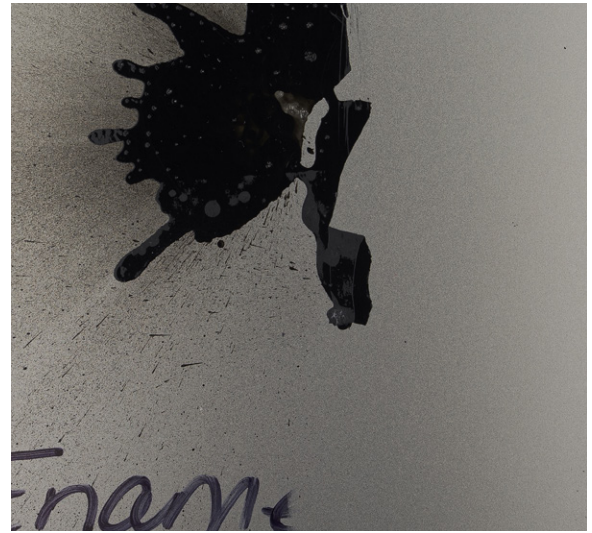

- Enamel spray paint and black permanent marker.
- Dried for 24 hours before removing with rubbing alcohol, microfiber cloth, and nylon plastic scraper.



- Brush tip paint pen.
- Dried for 24 hours before removing with rubbing alcohol and microfiber cloth.



- Metallic paint pen and metallic permanent marker.
- Dried for 24 hours before removing with rubbing alcohol and microfiber cloth.

Specifications

- Sheet size is 48" x 96" or 48" x 120".
- Approximate weight is 1.725 lbs/SF.
- Sheets are 20 gauge (.040"/1.016 mm thick) standard. 18 gauge and 16 gauge sheets are also available.
- When cutting to size, it is recommended that a sharp shear or bandsaw be used.
- Sheets can be easily cleaned with a mild soap and water solution or non-abrasive cleaner (i.e. Windex®) and a soft, lint-free cloth.

What installation options can be used?

- **Gage System E (Extrusion)** – Gage will supply in clear anodized finish.
- **Stand-Offs** – By contractor
- **Direct Glue** – Use appropriate commercial grade construction adhesive to mount to surface (i.e. sheetrock, MDF, or other)
- **Elevator Doors** – Panels can be formed to a 90° angle without damage to the finish.
- **Forming** – FRC can be formed to 180° bend.
- **Cut-Outs** – Can be cut with fiber or CO₂ laser, or die punched.